


## WSL SG60 Series Curtain Walling

The SG blast resistant curtain walling system offers a significant development in the design of blast mitigation glazing systems. Utilising grid profiles from the 60mm wide SR curtain walling range, the system is designed as a semi unitised, structurally glazed system. The narrow 60mm sightlines, in combination with the structurally glazed exterior gives the appearance of any other non-specialised glazed assembly, enabling the designer to move away from the traditional wide profiles normally associated with blast resistant applications. Fully accredited range test data according to ISO/DIS, ASTM and GSA standards is available in order to verify the performance of the system to hazard level none or hazard level low for a medium range lorry, or hazard level high for close range car bomb charges in multipanel large span configurations.

### OVERVIEW

- ◇ MULTIPLE FRAME OPTIONS
- ◇ HIGH QUALITY GALVANIZING
- ◇ INTERNAL & EXTERNAL APPLICATION
- ◇ POWDER COATED FINISH

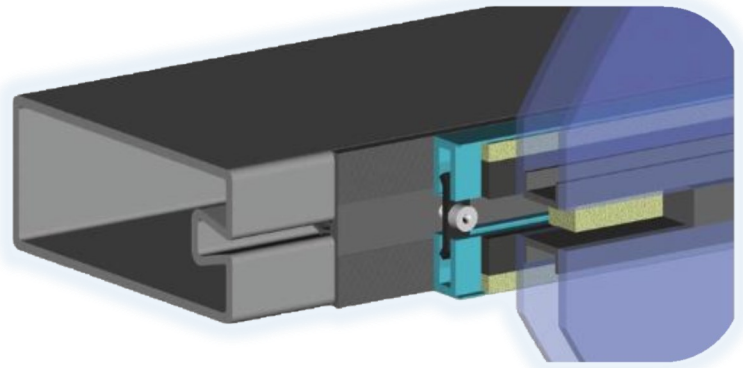

### SYSTEM SCOPE

- ◇ Framing Depth: 40, 60, 90, 140, & 180mm
- ◇ 60mm Width Profile
- ◇ Wall Thickness Of 2-3mm or 4mm
- ◇ Internal & External Applications