


WSL 50/60 Series Double Door Sets

The Wrightstyle 50/60 series of glazing systems provides an unlimited number of fire rated fenestration options.

Utilizing a range of high quality steel profile shapes it provides countless possibilities for integrity fire applications.

Profiles are produced from 2mm cold rolled pre galvanized steel to form the selection of profiles available.

Enhanced manufacturing procedures allows for strength, performance & slim sightlines.

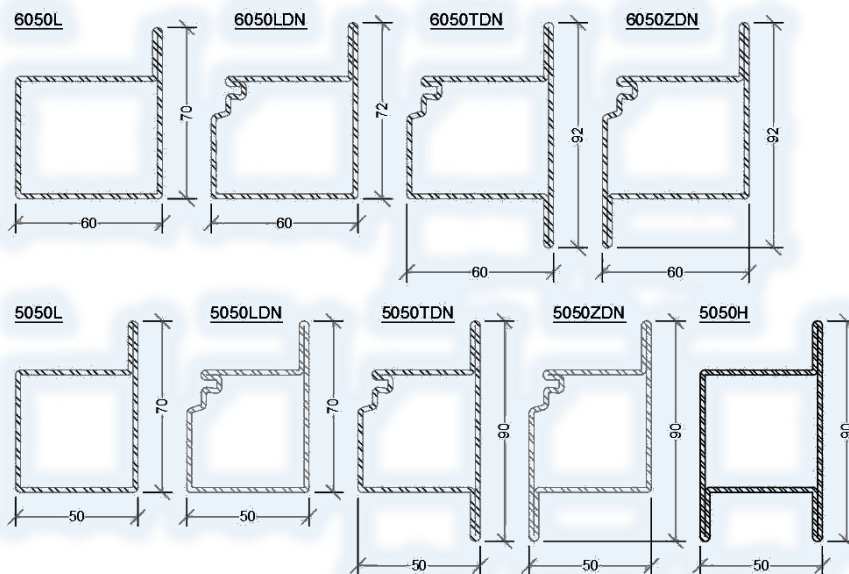

OVERVIEW

- ◇ MULTIPLE FRAME OPTIONS
- ◇ MULTIPLE HARDWARE OPTIONS
- ◇ HIGH QUALITY GALVANIZING
- ◇ INTERNAL & EXTERNAL APPLICATION
- ◇ E30, E60, E90 & E120 PERFORMANCE
- ◇ POWDER COATED FINISH
- ◇ FULLY UNLATCHED MASTER LEAF AVAILABLE
- ◇ LEAF AND HALF OPTION AVAILABLE
- ◇ E180 OPTIONS (UPON REQUEST)
- ◇ TAPE AND GASKET GLAZING

SYSTEM SCOPE

- ◇ Maximum Unlatched Door Frame:
 - ◇ E30: 2.44m W X 2.57m H
 - ◇ E60: 2.24m W X 2.37m H
 - ◇ E90: 2.24m W X 2.37m H
 - ◇ E120: 2.24m W X 2.17m H
- ◇ Maximum Latched Door Frame:
 - ◇ E30: 2.77m W X 2.7m H
 - ◇ E60: 2.54m W X 2.62m H
 - ◇ E90: 2.78m W X 2.71m H
 - ◇ E120: 2.44m W X 2.37m H
- ◇ Maximum Latched Leaf And Half Door Frame
 - ◇ E30: 2.11m W X 2.7m H
 - ◇ E60: 1.94m W X 2.47m H
- ◇ Glazing From 5mm—40mm Thick
- ◇ 50/60mm Framing Depth
- ◇ Auto Opening Mechanism Available